



**Spalding 2000  
Model # 411-800**

# SPALDING SPECIFICATIONS

**MODEL NUMBER:** 411800

**DESCRIPTION:** Spalding 2000 Portable Basketball Backstop

The Spalding Portable Backstop is designed for side court, schools, churches, and health club competition. One person can easily operate the backstop without hydraulics or electric motors. The standard backstop is equipped with a 54" x 42" glass backboard, Slammer Flex Rim, 725 lbs of ballast and frame padding.

## **SPECIFICATIONS:**

*Frame:* All pivot points are oil impregnated bronze bearings, no lubrication required. The backstop operates using four chrome vanadium springs; tension is adjustable for operational ease. The unit has an electro-statically powder coated white finish. Enamel paint is not acceptable. The backstop contains 725 pounds of recycled ballast, which is covered by a steel plate. The boom is constructed of 3-1/2" x 3-1/2" steel tubing, reinforced upper and lower for stability. The boom extends 5' from the face of the backboard to the front of the padded base. The uprights are made of 1-1/2" x 3" rectangle steel tubing configured in an A-Frame design. The backstop has two, 4" fixed rear wheels and two, 4" front swivel casters. Each wheel has a 600-pound capacity. The wheels contain 2 rows of ball bearings encased in prelubricated casings. The telescopic brace contains a powder coated outer sleeve and a powder coated inner sleeve pre-drilled to allow for adjustment heights between 7'6" to 10', the backboard remains perpendicular with the floor at all locations. The backboard and rim are adjustable at the frame attachment location for non-level playing surfaces. The rubber position pedestals are adjustable to ensure 10' goal elevation. Ten year limited warranty on frame, two year on telescoping brace, and two years on the four pedestals.

*Frame Padding:* The front pads are fitted with 2" thick padding and the sides are fitted with 1" thick padding and covered with 14 ounce vinyl.


*Backboard:* The backboard measures 54"x 42" and is constructed of 1/2" tempered glass w/2" border and target fired into the back of the glass.

*Goal:* Slammer Flex Rim meets NFHS specifications. Flex action, orange powder coating, and continuous ram horn net system. one-year warranty.


*Shipping weight:* 1500 lbs.(approximate)

# SPALDING


## STORAGE AND PLAY CRITICAL DIMENSIONS

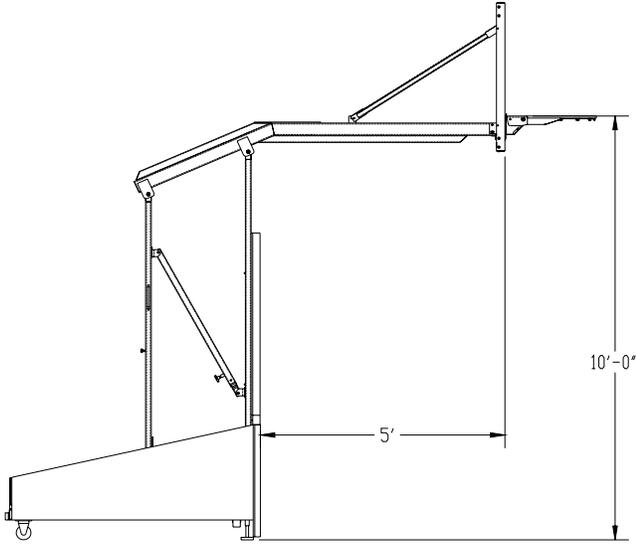


10 FOOT

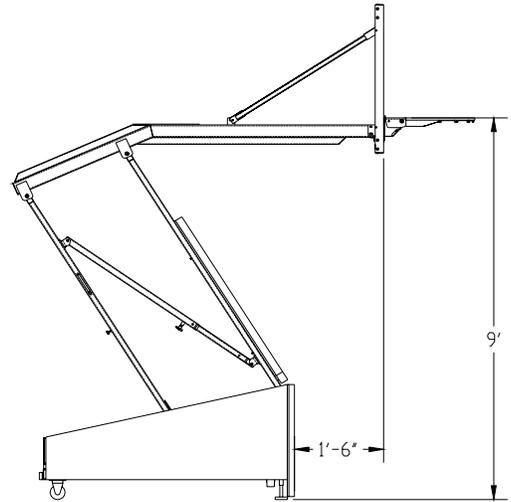


9 FOOT

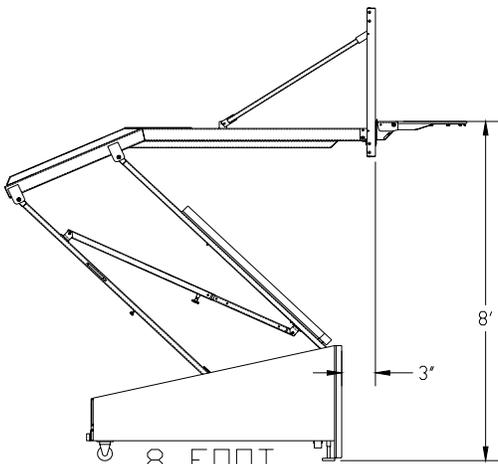

8 FOOT

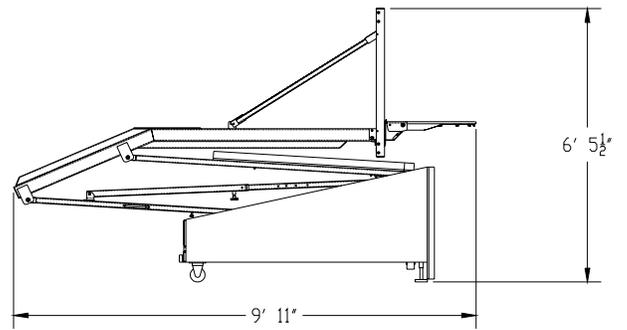

STORAGE

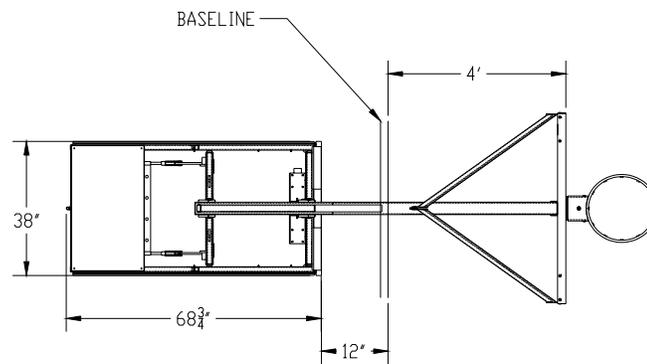

TOP VIEW