




PROTECTIVE WALL PADDING

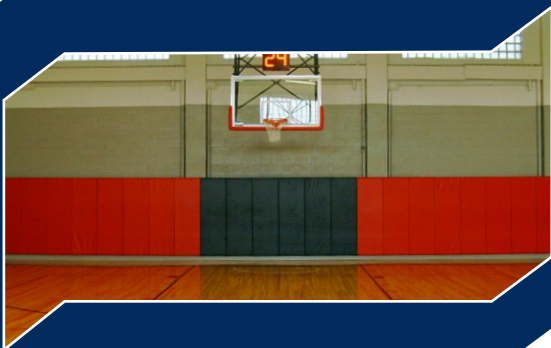


SAFETY TIP:

Wall pads should be a minimum of 6' high and installed at a maximum of 6" above the finished floor.

CLASS A FIRE WALL PADS

- 2 7/16" (62mm) thick protective wall padding that can be permanently installed or removable
- Constructed of 7/16" (11mm) O.S.B backing, 2" polychloroprene foam and 18 oz. vinyl cover
- Class A Fire Rating (meets ASTM E84 testing procedures)



Class A Fire Wall Pads

2" POLYURETHANE WALL PADS

- 2 7/16" (62mm) thick protective wall padding that can be permanently installed or removable
- Constructed of 7/16" (11mm) O.S.B backing, 2" 100 ILD polyurethane foam and 18 oz. vinyl cover



2" 100 ILD Polyurethane Wall Pads

2" LAMINATE

- 2 7/16" (62mm) thick protective wall padding that can be permanently installed or removable
- Constructed of 7/16" (11mm) O.S.B backing, 2" laminated polyethylene foam and 18 oz. vinyl cover



2" Laminate Wall Pads

- Standard wall pad size is 2' x 6'
- Choose from a variety of standard colors
- Vinyl cover meets National Fire Protection Standard 701, ASTM E-84 and CAL 117



DIGITAL GRAPHIC WALL PADS - All digital graphics are printed using state-of-the-art, six-color large format printers. Durable, vivid inks are designed to be long-lasting relative to the silk-screens and vinyl applications of the past. High resolution printing provides sharp image quality from any distance.



CUSTOMIZATION MADE EASY

- Any Spalding Wall Pad can be custom printed to match your logo and color scheme specifications
- Full color printing allows unlimited color options
- Artwork is printed directly onto vinyl covers and attached to backing material



www.spaldingequipment.com



spaldingequipment



@spaldingequip

PLEASE CONTACT SPALDING FOR ORDERING INFORMATION **800-435-3865**